


## VB

Connection plate

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.

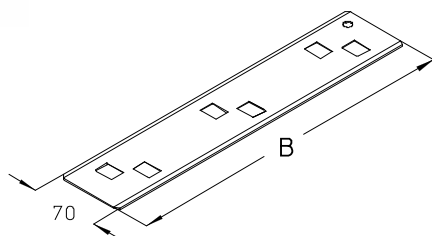

### Continuously hot galvanized (Senzimir process) (DIN EN 10346)

| Product | B      | L     | G       |
|---------|--------|-------|---------|
| VB 10S  | 54 mm  | 70 mm | 0,04 kg |
| VB 20S  | 155 mm | 70 mm | 0,11 kg |
| VB 30S  | 255 mm | 70 mm | 0,18 kg |
| VB 40S  | 355 mm | 70 mm | 0,27 kg |
| VB 50S  | 455 mm | 70 mm | 0,32 kg |
| VB 60S  | 555 mm | 70 mm | 0,38 kg |

### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Product | B      | L     | G       |
|---------|--------|-------|---------|
| VB 10F  | 54 mm  | 70 mm | 0,04 kg |
| VB 20F  | 155 mm | 70 mm | 0,11 kg |
| VB 30F  | 255 mm | 70 mm | 0,19 kg |
| VB 40F  | 355 mm | 70 mm | 0,28 kg |
| VB 50F  | 455 mm | 70 mm | 0,34 kg |
| VB 60F  | 555 mm | 70 mm | 0,40 kg |

### Stainless steel, according to ASTM 304 / BS 304 S 3





| Product | B      | L     | G       |
|---------|--------|-------|---------|
| VB 10E  | 54 mm  | 70 mm | 0,04 kg |
| VB 20E  | 155 mm | 70 mm | 0,11 kg |
| VB 30E  | 255 mm | 70 mm | 0,18 kg |
| VB 40E  | 355 mm | 70 mm | 0,27 kg |
| VB 50E  | 455 mm | 70 mm | 0,32 kg |
| VB 60E  | 555 mm | 70 mm | 0,38 kg |

**B** : Width

**L** : Length

**G** : Weight

