

## R 85

Cable tray, not perforated, height=85 mm

Cable tray, not perforated, head shape suitable for positive locking covers, with longitudinal and lateral reinforcing rims reducing bottom deflection, certified including electrical conductivity according to DIN EN 61537. Side and bottom connectors are provided for assembly.

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.



### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	t	A	Q <sub>SK</sub>	G
R 85-10S	85 mm	100 mm	3000 mm	0,75 mm	81 cm <sup>2</sup>	0,12 kN/m	5,50 kg
R 85-20S	85 mm	200 mm	3000 mm	0,75 mm	163 cm <sup>2</sup>	0,25 kN/m	7,20 kg
R 85-30S	85 mm	300 mm	3000 mm	0,88 mm	246 cm <sup>2</sup>	0,37 kN/m	10,50 kg
R 85-40S	85 mm	400 mm	3000 mm	0,88 mm	328 cm <sup>2</sup>	0,49 kN/m	12,60 kg
R 85-50S	85 mm	500 mm	3000 mm	1,00 mm	411 cm <sup>2</sup>	0,62 kN/m	16,70 kg
R 85-60S	85 mm	600 mm	3000 mm	1,00 mm	493 cm <sup>2</sup>	0,74 kN/m	19,00 kg

### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	A	Q <sub>SK</sub>	G
R 85-10F	85 mm	100 mm	3000 mm	0,75 mm	81 cm <sup>2</sup>	0,12 kN/m	6,10 kg
R 85-20F	85 mm	200 mm	3000 mm	0,75 mm	163 cm <sup>2</sup>	0,25 kN/m	8,10 kg
R 85-30F	85 mm	300 mm	3000 mm	0,88 mm	246 cm <sup>2</sup>	0,37 kN/m	11,60 kg
R 85-40F	85 mm	400 mm	3000 mm	0,88 mm	328 cm <sup>2</sup>	0,49 kN/m	13,90 kg
R 85-50F	85 mm	500 mm	3000 mm	1,00 mm	411 cm <sup>2</sup>	0,62 kN/m	18,20 kg
R 85-60F	85 mm	600 mm	3000 mm	1,00 mm	493 cm <sup>2</sup>	0,74 kN/m	20,80 kg

**H** : Height


**B** : Width

**L** : Length



**t** : Material thickness  
**A** : Cross section area  
**Q<sub>SK</sub>** : Distributed load control cable  
**G** : Weight

## DETAILS / APPLICATIONS

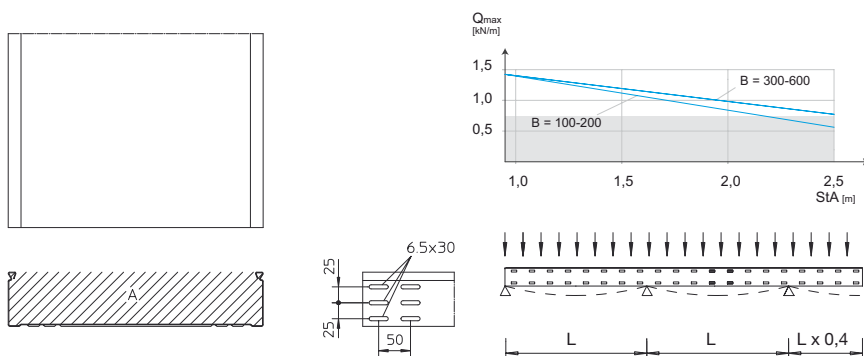

## OPTIONAL ACCESSORIES

RB 85, RB45 85, RAA 85, RA 85, RK 85, RVB 85, RR 85, RAB 85, REB, RGV 85, VB, RTR 85, KLR



Do not walk upon!



Certyfikat UL

