

RGC 60

Cable tray, light, perforated, height=60 mm

Cable tray, light, perforated, head shape suitable for positive locking covers, with longitudinal and lateral reinforcing rims reducing bottom deflection, certified including electrical conductivity according to DIN EN 61537. Side and bottom connectors are provided for assembly.

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	A	Q_{sk}	t	G
RGC 60-05S	60 mm	50 mm	3000 mm	30 cm ²	0,04 kN/m	0,55 mm	2,20 kg
RGC 60-10S	60 mm	100 mm	3000 mm	56 cm ²	0,09 kN/m	0,55 mm	2,70 kg
RGC 60-20S	60 mm	200 mm	3000 mm	113 cm ²	0,17 kN/m	0,55 mm	3,80 kg
RGC 60-30S	60 mm	300 mm	3000 mm	171 cm ²	0,26 kN/m	0,55 mm	5,00 kg


Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	L	A	Q_{sk}	t	G
RGC 60-05E	60 mm	50 mm	3000 mm	30 cm ²	0,04 kN/m	0,55 mm	2,20 kg
RGC 60-10E	60 mm	100 mm	3000 mm	56 cm ²	0,09 kN/m	0,55 mm	2,70 kg
RGC 60-20E	60 mm	200 mm	3000 mm	113 cm ²	0,17 kN/m	0,55 mm	3,80 kg
RGC 60-30E	60 mm	300 mm	3000 mm	171 cm ²	0,26 kN/m	0,55 mm	5,00 kg

- H** : Height
- B** : Width
- L** : Length
- t** : Material thickness
- A** : Cross section area
- Q_{sk}** : Distributed load control cable
- G** : Weight



DETAILS / APPLICATIONS

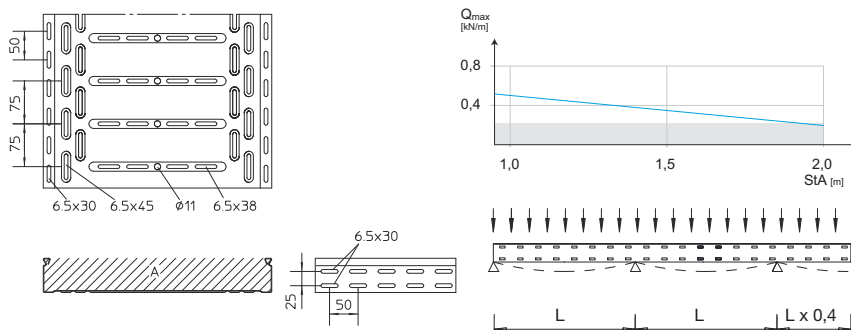

OPTIONAL ACCESSORIES

RB 60, RB45 60, RAE 60, RAA 60, RA 60, RK 60, RVB 60, RR 60, RAB 60, REB, RGV 60, RGV5, VB, RTR 60, KLP



Do not walk upon!



System E 90. CNBOP-PIB

