

## RGS 85

Cable tray, heavy, perforated, height=85 mm

Cable tray, heavy, perforated, head shape suitable for positive locking covers, with longitudinal and lateral reinforcing rims reducing bottom deflection, certified including electrical conductivity according to DIN EN 61537. Side and bottom connectors are provided for assembly.




Continuously hot galvanized (Senzimir process) (DIN EN 10346)

Product	H	B	L	t	A	Q <sub>sk</sub>	G
RGS 85-10S	85 mm	100 mm	3000 mm	1,50 mm	82 cm <sup>2</sup>	0,12 kN/m	9,84 kg
RGS 85-20S	85 mm	200 mm	3000 mm	1,50 mm	167 cm <sup>2</sup>	0,25 kN/m	12,84 kg
RGS 85-30S	85 mm	300 mm	3000 mm	1,50 mm	252 cm <sup>2</sup>	0,38 kN/m	16,14 kg
RGS 85-40S	85 mm	400 mm	3000 mm	1,50 mm	337 cm <sup>2</sup>	0,51 kN/m	19,45 kg
RGS 85-50S	85 mm	500 mm	3000 mm	1,50 mm	422 cm <sup>2</sup>	0,63 kN/m	22,75 kg
RGS 85-60S	85 mm	600 mm	3000 mm	1,50 mm	507 cm <sup>2</sup>	0,76 kN/m	26,07 kg

- H** : Height
- B** : Width
- L** : Length
- t** : Material thickness
- A** : Cross section area
- Q<sub>sk</sub>** : Distributed load control cable
- G** : Weight

## DETAILS / APPLICATIONS



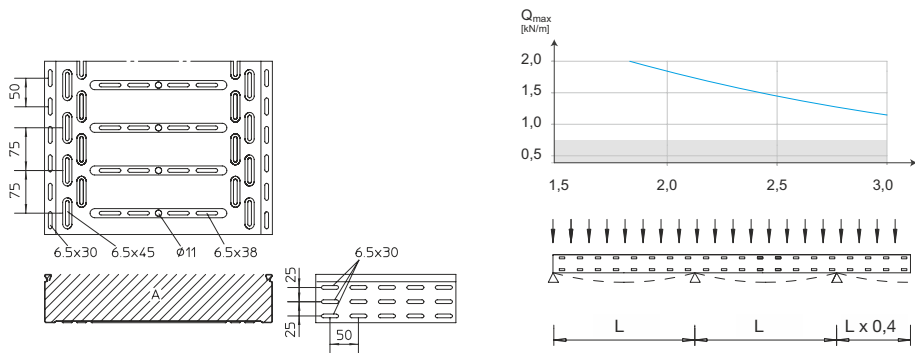

## OPTIONAL ACCESSORIES

RB 85, RB45 85, RBV 85, RAE 85, RAA 85, RA 85, RK 85, RVB 85, RR 85, RAB 85, REB, RGV 85, VB, RTR 85, RKAB, KLR, RD, RDR



Do not walk upon!



TÜV certified



Certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)

