

RI 60

Cable installation tray, height=60 mm

Cable installation tray with big side and bottom perforation for leading cables out, head shape suitable for positive locking covers, certified including electrical conductivity according to DIN EN 61537. Side and bottom connectors are provided for assembly.



• BAMA
• GEPRU
• TYPE
• APPRO



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	t	A	Q _{SK}	G
RI 60-05S	60 mm	50 mm	3000 mm	1,00 mm	26 cm ²	0,04 kN/m	3,50 kg
RI 60-10S	60 mm	100 mm	3000 mm	1,00 mm	56 cm ²	0,09 kN/m	4,50 kg
RI 60-15S	60 mm	150 mm	3000 mm	1,00 mm	84 cm ²	0,13 kN/m	5,70 kg
RI 60-20S	60 mm	200 mm	3000 mm	1,00 mm	113 cm ²	0,17 kN/m	6,30 kg
RI 60-30S	60 mm	300 mm	3000 mm	1,00 mm	171 cm ²	0,26 kN/m	8,00 kg

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	A	Q _{SK}	G
RI 60-05F	60 mm	50 mm	3000 mm	1,00 mm	26 cm ²	0,04 kN/m	3,80 kg
RI 60-10F	60 mm	100 mm	3000 mm	1,00 mm	56 cm ²	0,09 kN/m	4,80 kg
RI 60-15F	60 mm	150 mm	3000 mm	1,00 mm	84 cm ²	0,13 kN/m	6,10 kg
RI 60-20F	60 mm	200 mm	3000 mm	1,00 mm	113 cm ²	0,17 kN/m	6,70 kg
RI 60-30F	60 mm	300 mm	3000 mm	1,00 mm	171 cm ²	0,26 kN/m	8,60 kg

Stainless steel, according to ASTM 304 / BS 304 S 3



Product	H	B	L	t	A	Q _{SK}	G
RI 60-05E	60 mm	50 mm	3000 mm	1,00 mm	26 cm ²	0,04 kN/m	3,49 kg



Product	H	B	L	t	A	Q_{sk}	G
RI 60-10E	60 mm	100 mm	3000 mm	1,00 mm	56 cm ²	0,09 kN/m	4,50 kg
RI 60-15E	60 mm	150 mm	3000 mm	1,00 mm	84 cm ²	0,13 kN/m	5,70 kg
RI 60-20E	60 mm	200 mm	3000 mm	1,00 mm	113 cm ²	0,17 kN/m	6,30 kg
RI 60-30E	60 mm	300 mm	3000 mm	1,00 mm	171 cm ²	0,26 kN/m	8,00 kg

- H** : Height
- B** : Width
- L** : Length
- t** : Material thickness
- A** : Cross section area
- Q_{sk}** : Distributed load control cable
- G** : Weight

DETAILS / APPLICATIONS

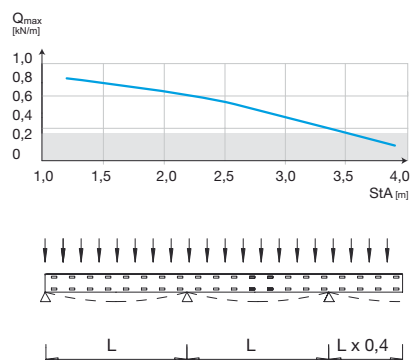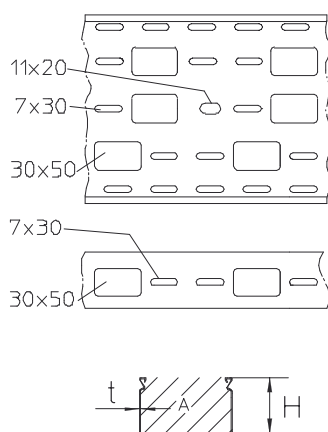

OPTIONAL ACCESSORIES

RIV 60, VB, REB, KSR, AHB, KLR, RID, RIDR



Do not walk upon!



TÜV certified





Certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)

