


KHA 4

C-rail, perforated, 48x26 mm



Profile rail 48x26x2,50 mm, with continuous perforation 13x26 mm. Slot size 22 mm.


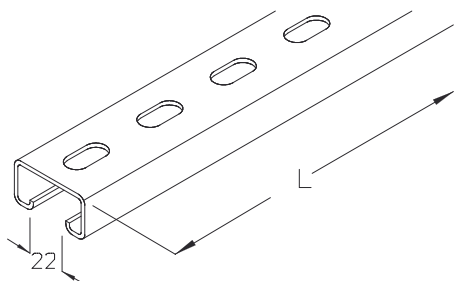


Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
KHA 4-30F	26 mm	48 mm	3000 mm	2,50 mm	6,80 kg
KHA 4-60F	26 mm	48 mm	6000 mm	2,50 mm	13,60 kg

H : Height
B : Width
L : Length
t : Material thickness
G : Weight

DETAILS / APPLICATIONS





OPTIONAL ACCESSORIES

HS22, SKS H



System E30 - E90. CNBOP-PIB nr CNBOP-PIB-KOT-2017/0013-3703

