


A 7

C-rail, not perforated, 40x22 mm

Profile rail 40x22x1,50 mm, not perforated.
Slot size 18 mm.

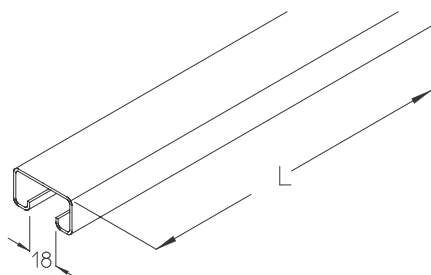

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Product | H | B | L | t | G |
|---------|-------|---------|---------|---------|---------|
| A 7-30S | 22 mm | 39,5 mm | 3000 mm | 1,50 mm | 3,90 kg |
| A 7-60S | 22 mm | 39,5 mm | 6000 mm | 1,50 mm | 7,80 kg |


Stainless steel, according to ASTM 304 / BS 304 S 3

| Product | H | B | L | t | G |
|---------|-------|---------|---------|---------|---------|
| A 7-30E | 22 mm | 39,5 mm | 3000 mm | 1,50 mm | 3,60 kg |
| A 7-60E | 22 mm | 39,5 mm | 6000 mm | 1,50 mm | 7,20 kg |

- H** : Height
- B** : Width
- L** : Length
- t** : Material thickness
- G** : Weight

DETAILS / APPLICATIONS



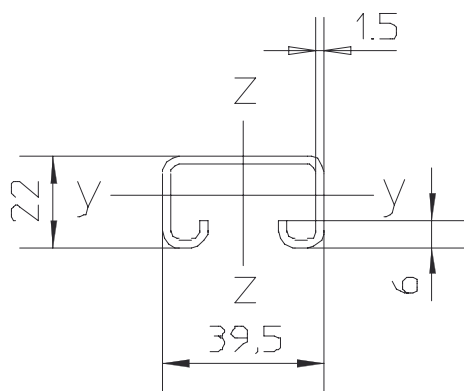

OPTIONAL ACCESSORIES

HS 18, AM18, AMF18



System E30 - E90. CNBOP-PIB nr CNBOP-PIB-KOT-2017/0013-3703

