


B 6

Profile rail, not perforated, 28x15 mm

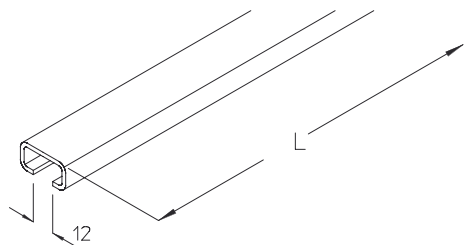

Profile rail 28x15x2,30 mm, without perforation.
Slot size 12 mm.

Steel, untreated and non-corrosive

Product	H	B	L	t	G
B 6-30B	15 mm	28 mm	3000 mm	2,30 mm	3,10 kg
B 6-60B	15 mm	28 mm	6000 mm	2,30 mm	6,30 kg

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	t	G
B 6-30F	15 mm	28 mm	3000 mm	2,30 mm	3,40 kg
B 6-60F	15 mm	28 mm	6000 mm	2,30 mm	6,70 kg


Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
B 6-30E	15 mm	28 mm	3000 mm	2,30 mm	3,10 kg
B 6-60E	15 mm	28 mm	6000 mm	2,30 mm	6,30 kg

H : Height
B : Width
L : Length
t : Material thickness
G : Weight



DETAILS / APPLICATIONS

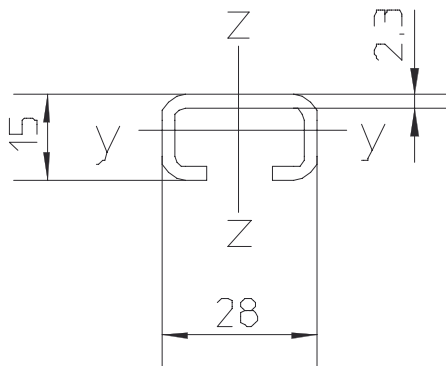

OPTIONAL ACCESSORIES

HS12, AM12

