


## B 7

Profile rail, not perforated, 30x15 mm

Profile rail 30x15x1,50 mm, without perforation.  
Slot size 16 mm.

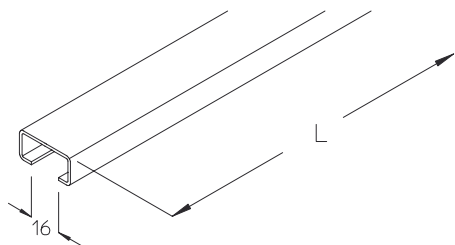

### Steel, untreated and non-corrosive

Product	H	B	L	t	G
B 7-30B	15 mm	30 mm	3000 mm	1,50 mm	2,20 kg
B 7-60B	15 mm	30 mm	6000 mm	1,50 mm	4,40 kg

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	t	G
B 7-30S	15 mm	30 mm	3000 mm	1,50 mm	2,30 kg
B 7-60S	15 mm	30 mm	6000 mm	1,50 mm	4,50 kg

### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
B 7-30F	15 mm	30 mm	3000 mm	1,50 mm	2,40 kg
B 7-60F	15 mm	30 mm	6000 mm	1,50 mm	4,80 kg




Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	L	t	G
B 7-30E	15 mm	30 mm	3000 mm	1,50 mm	2,20 kg
B 7-60E	15 mm	30 mm	6000 mm	1,50 mm	4,40 kg

**H** : Height  
**B** : Width  
**L** : Length  
**t** : Material thickness  
**G** : Weight

## DETAILS / APPLICATIONS

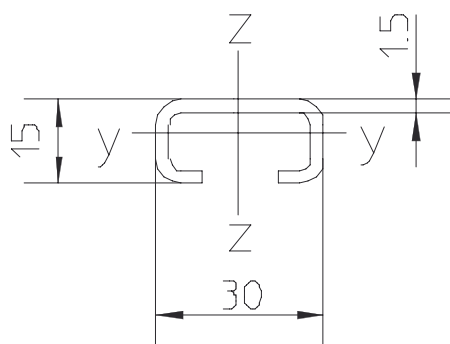

## OPTIONAL ACCESSORIES

HS16, AM16



System E30 - E90. CNBOP-PIB nr CNBOP-PIB-KOT-2017/0013-3703

