

KHU 80

Kształtownik perforowany, profil U80

Kształtownik perforowany, profil U, 80x60x5 mm. Perforacja z trzech stron.

Ocynk zanurzeniowo-ogniowy, zgodnie z BS 729 (DIN EN ISO 1461)



Produkt	H	B	L	t	G
KHU 80-02F	80 mm	60 mm	200 mm	5,00 mm	1,33 kg
KHU 80-03F	80 mm	60 mm	300 mm	5,00 mm	2,00 kg
KHU 80-04F	80 mm	60 mm	400 mm	5,00 mm	2,66 kg
KHU 80-05F	80 mm	60 mm	500 mm	5,00 mm	3,33 kg
KHU 80-06F	80 mm	60 mm	600 mm	5,00 mm	3,99 kg
KHU 80-07F	80 mm	60 mm	700 mm	5,00 mm	4,66 kg
KHU 80-08F	80 mm	60 mm	800 mm	5,00 mm	5,32 kg
KHU 80-09F	80 mm	60 mm	900 mm	5,00 mm	5,99 kg
KHU 80-10F	80 mm	60 mm	1000 mm	5,00 mm	6,65 kg
KHU 80-11F	80 mm	60 mm	1100 mm	5,00 mm	7,32 kg
KHU 80-12F	80 mm	60 mm	1200 mm	5,00 mm	7,98 kg
KHU 80-13F	80 mm	60 mm	1300 mm	5,00 mm	8,65 kg
KHU 80-14F	80 mm	60 mm	1400 mm	5,00 mm	9,32 kg
KHU 80-15F	80 mm	60 mm	1500 mm	5,00 mm	9,98 kg
KHU 80-16F	80 mm	60 mm	1600 mm	5,00 mm	10,65 kg
KHU 80-17F	80 mm	60 mm	1700 mm	5,00 mm	11,31 kg
KHU 80-18F	80 mm	60 mm	1800 mm	5,00 mm	11,98 kg
KHU 80-19F	80 mm	60 mm	1900 mm	5,00 mm	12,64 kg
KHU 80-20F	80 mm	60 mm	2000 mm	5,00 mm	13,31 kg
KHU 80-30F	80 mm	60 mm	3000 mm	5,00 mm	19,96 kg
KHU 80-60F	80 mm	60 mm	6000 mm	5,00 mm	39,92 kg

Strona 1



H : Wysokość
B : Szerokość
L : Długość
t : Grubość materiału
G : Waga

DETALE / ZASTOSOWANIE

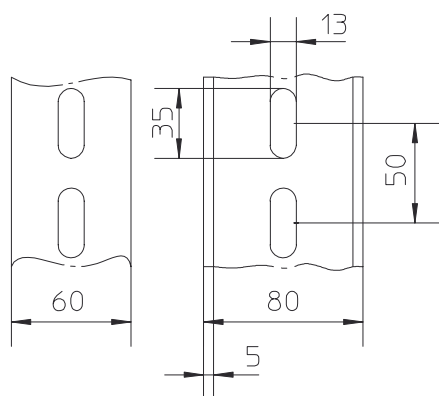

$$\begin{aligned}
 A_q &= 7.23 \text{ cm}^2 \\
 W_y &= 7.61 \text{ cm}^3 \\
 W_z &= 18.87 \text{ cm}^3 \\
 I_y &= 30.11 \text{ cm}^4 \\
 I_z &= 75.48 \text{ cm}^4
 \end{aligned}$$

OPCJONALNE AKCESORIA

BGU 80, KHUV 80, KHUSS 80, KW, KLS, SU 80

