


G 50

Wire mesh cable tray, height=53 mm

Wire mesh cable tray, U-shape, certified including electrical conductivity according to DIN EN 61537/VDE 0639.

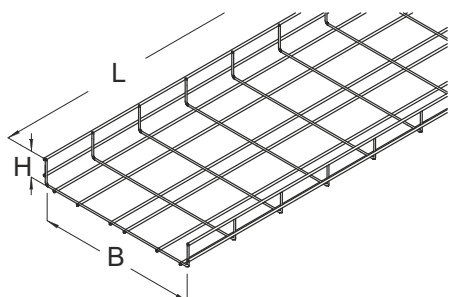

• BAUS
• GEFÜHR
• TYPE
• APPRO



Pre-galvanised (PN-EN 10244-2)

Product	H	B	L	a	t	A	Q _{SK}	G
G 50-06S	53 mm	60 mm	3000 mm	30 mm	4,00 mm	25 cm ²	0,04 kN/m	2,20 kg
G 50-10S	53 mm	100 mm	3000 mm	30 mm	4,00 mm	45 cm ²	0,07 kN/m	2,30 kg
G 50-20S	53 mm	200 mm	3000 mm	30 mm	4,00 mm	90 cm ²	0,14 kN/m	3,20 kg
G 50-30S	53 mm	300 mm	3000 mm	30 mm	4,00 mm	135 cm ²	0,20 kN/m	4,10 kg
G 50-40S	53 mm	400 mm	3000 mm	30 mm	4,50 mm	176 cm ²	0,26 kN/m	6,30 kg
G 50-50S	53 mm	500 mm	3000 mm	30 mm	4,50 mm	220 cm ²	0,33 kN/m	7,40 kg
G 50-60S	53 mm	600 mm	3000 mm	30 mm	4,50 mm	264 cm ²	0,40 kN/m	8,50 kg

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	a	t	A	Q _{SK}	G
G 50-06F	53 mm	60 mm	3000 mm	30 mm	4,00 mm	25 cm ²	0,04 kN/m	2,31 kg
G 50-10F	53 mm	100 mm	3000 mm	30 mm	4,00 mm	45 cm ²	0,07 kN/m	2,40 kg
G 50-20F	53 mm	200 mm	3000 mm	30 mm	4,00 mm	90 cm ²	0,14 kN/m	3,30 kg
G 50-30F	53 mm	300 mm	3000 mm	30 mm	4,00 mm	135 cm ²	0,20 kN/m	4,20 kg
G 50-40F	53 mm	400 mm	3000 mm	30 mm	4,50 mm	176 cm ²	0,26 kN/m	6,50 kg
G 50-50F	53 mm	500 mm	3000 mm	30 mm	4,50 mm	220 cm ²	0,33 kN/m	7,70 kg
G 50-60F	53 mm	600 mm	3000 mm	30 mm	4,50 mm	264 cm ²	0,40 kN/m	8,80 kg





Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	L	a	t	A	Q _{sk}	G
G 50-06E	53 mm	60 mm	3000 mm	30 mm	4,00 mm	25 cm ²	0,04 kN/m	2,20 kg
G 50-10E	53 mm	100 mm	3000 mm	30 mm	4,00 mm	45 cm ²	0,07 kN/m	2,30 kg
G 50-20E	53 mm	200 mm	3000 mm	30 mm	4,00 mm	90 cm ²	0,14 kN/m	3,20 kg
G 50-30E	53 mm	300 mm	3000 mm	30 mm	4,00 mm	135 cm ²	0,20 kN/m	4,10 kg
G 50-40E	53 mm	400 mm	3000 mm	30 mm	4,50 mm	176 cm ²	0,26 kN/m	6,30 kg
G 50-50E	53 mm	500 mm	3000 mm	30 mm	4,50 mm	220 cm ²	0,33 kN/m	7,40 kg
G 50-60E	53 mm	600 mm	3000 mm	30 mm	4,50 mm	264 cm ²	0,40 kN/m	8,50 kg




Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	H	B	L	a	t	A	Q _{sk}	G
G 50-06E4	53 mm	60 mm	3000 mm	30 mm	4,00 mm	25 cm ²	0,04 kN/m	2,20 kg
G 50-10E4	53 mm	100 mm	3000 mm	30 mm	4,00 mm	45 cm ²	0,07 kN/m	2,30 kg
G 50-20E4	53 mm	200 mm	3000 mm	30 mm	4,00 mm	90 cm ²	0,14 kN/m	3,20 kg
G 50-30E4	53 mm	300 mm	3000 mm	30 mm	4,00 mm	135 cm ²	0,20 kN/m	4,10 kg
G 50-40E4	53 mm	400 mm	3000 mm	30 mm	4,50 mm	176 cm ²	0,26 kN/m	6,30 kg
G 50-50E4	53 mm	500 mm	3000 mm	30 mm	4,50 mm	220 cm ²	0,33 kN/m	7,40 kg
G 50-60E4	53 mm	600 mm	3000 mm	30 mm	4,50 mm	264 cm ²	0,40 kN/m	8,50 kg

- H** : Height
- B** : Width
- L** : Length
- a** : Wire distance
- t** : Material thickness
- A** : Cross section area
- Q_{sk}** : Distributed load control cable
- G** : Weight

DETAILS / APPLICATIONS



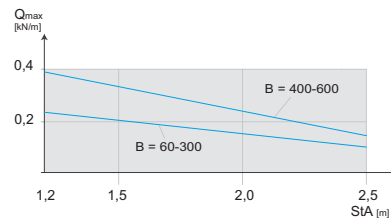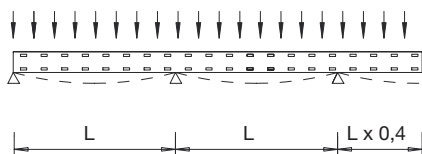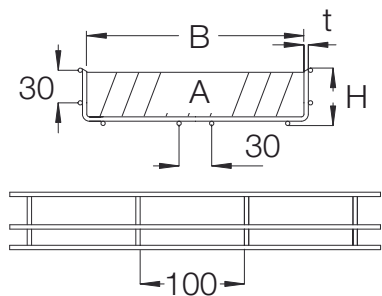

OPTIONAL ACCESSORIES

GV 30, GVD 30, GV-L 30, GVU, GVK, GTR 50, MP-G, KLU



Do not walk upon!



TÜV certified



Certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)



System E 90. CNBOP-PIB

