


## RBDR

Cable tray bend cover with turning bolts

Cable tray bend cover, positive locking, with additional turning bolts.

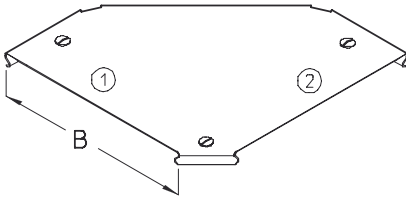

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	B	G
RBDR 05S	50 mm	0,130 kg
RBDR 10S	100 mm	0,165 kg
RBDR 20S	200 mm	0,390 kg
RBDR 30S	300 mm	0,980 kg
RBDR 40S	400 mm	1,560 kg
RBDR 50S	500 mm	2,810 kg
RBDR 60S	600 mm	3,860 kg

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	B	G
RBDR 05F	50 mm	0,140 kg
RBDR 10F	100 mm	0,222 kg
RBDR 20F	200 mm	0,505 kg
RBDR 30F	300 mm	0,990 kg
RBDR 40F	400 mm	1,716 kg
RBDR 50F	500 mm	3,096 kg
RBDR 60F	600 mm	4,246 kg



Stainless steel, according to ASTM 304 / BS 304 S 3

Product	B	G
RBDR 05E	50 mm	0,130 kg
RBDR 10E	100 mm	0,165 kg
RBDR 20E	200 mm	0,390 kg
RBDR 30E	300 mm	0,980 kg
RBDR 40E	400 mm	1,560 kg
RBDR 50E	500 mm	2,810 kg
RBDR 60E	600 mm	3,860 kg

Stainless steel, material no. 1.4571 (ANSI 316 Ti) / 1.4404 (ANSI 316 L)

Product	B	G
RBDR 05E4	50 mm	0,130 kg
RBDR 10E4	100 mm	0,165 kg
RBDR 20E4	200 mm	0,390 kg
RBDR 30E4	300 mm	0,980 kg
RBDR 40E4	400 mm	1,560 kg
RBDR 50E4	500 mm	2,810 kg
RBDR 60E4	600 mm	3,860 kg

**B** : Width

**G** : Weight

## DETAILS / APPLICATIONS

