


LAD

Pokrywa odgałęzienia drabinki kablowej

Pokrywa odgałęzienia drabinki kablowej.

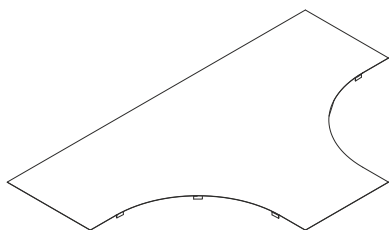

Ocynk metodą Sendzimira, zgodnie z DIN EN 10346

Produkt	B	R	G
LAD 10S	104 mm	398 mm	1,55 kg
LAD 20S	204 mm	398 mm	2,67 kg
LAD 30S	304 mm	398 mm	5,14 kg
LAD 40S	404 mm	398 mm	6,93 kg
LAD 50S	504 mm	398 mm	11,06 kg
LAD 60S	604 mm	398 mm	13,68 kg

Ocynk zanurzeniowo-ogniowy, zgodnie z BS 729 (DIN EN ISO 1461)

Produkt	B	R	G
LAD 10F	104 mm	398 mm	1,76 kg
LAD 20F	204 mm	398 mm	2,86 kg
LAD 30F	304 mm	398 mm	5,50 kg
LAD 40F	404 mm	398 mm	7,42 kg
LAD 50F	504 mm	398 mm	11,83 kg
LAD 60F	604 mm	398 mm	14,64 kg



Stal nierdzewna, zgodnie z ASTM 304 / BS 304 S 3

Produkt	B	R	G
LAD 10E	104 mm	398 mm	1,57 kg
LAD 20E	204 mm	398 mm	2,85 kg
LAD 30E	304 mm	398 mm	5,17 kg
LAD 40E	404 mm	398 mm	6,97 kg
LAD 50E	504 mm	398 mm	11,13 kg
LAD 60E	604 mm	398 mm	13,77 kg

B : Szerokość

R : Promień

G : Waga

DETALE / ZASTOSOWANIE

