


# KSL-SP

Spacer KSL

The products can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)


Product	H	B	G
KSL-SP S	35 mm	18 mm	0,03 kg

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	G
KSL-SP F	35 mm	18 mm	0,03 kg

**H** : Height  
**B** : Width  
**G** : Weight

## DETAILS / APPLICATIONS

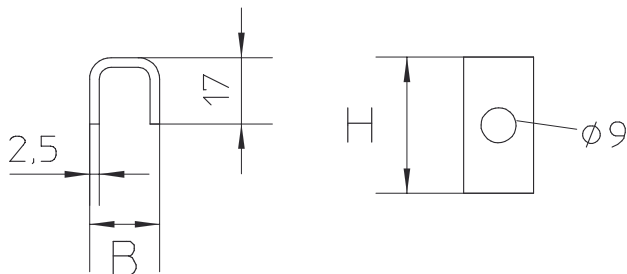



System E30 - E90. CNBOP-PIB nr CNBOP-PIB-KOT-2017/0013-3703

