

KHU 60

Bracket support, heavy, U60

Bracket support, U-profile 60x40x4 mm, continuously three-way perforated.

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.



Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
KHU 60-02F	40 mm	60 mm	200 mm	4,00 mm	0,70 kg
KHU 60-03F	40 mm	60 mm	300 mm	4,00 mm	1,10 kg
KHU 60-04F	40 mm	60 mm	400 mm	4,00 mm	1,40 kg
KHU 60-05F	40 mm	60 mm	500 mm	4,00 mm	1,80 kg
KHU 60-06F	40 mm	60 mm	600 mm	4,00 mm	2,10 kg
KHU 60-07F	40 mm	60 mm	700 mm	4,00 mm	2,50 kg
KHU 60-08F	40 mm	60 mm	800 mm	4,00 mm	2,80 kg
KHU 60-09F	40 mm	60 mm	900 mm	4,00 mm	3,20 kg
KHU 60-10F	40 mm	60 mm	1000 mm	4,00 mm	3,50 kg
KHU 60-11F	40 mm	60 mm	1100 mm	4,00 mm	3,90 kg
KHU 60-12F	40 mm	60 mm	1200 mm	4,00 mm	4,20 kg
KHU 60-13F	40 mm	60 mm	1300 mm	4,00 mm	4,60 kg
KHU 60-14F	40 mm	60 mm	1400 mm	4,00 mm	4,90 kg
KHU 60-15F	40 mm	60 mm	1500 mm	4,00 mm	5,30 kg
KHU 60-20F	40 mm	60 mm	2000 mm	4,00 mm	7,00 kg
KHU 60-30F	40 mm	60 mm	3000 mm	4,00 mm	10,50 kg
KHU 60-60F	40 mm	60 mm	6000 mm	4,00 mm	21,10 kg



Stainless steel, according to ASTM 304 / BS 304 S 3



Product	H	B	L	t	G
KHU 60-30E	40 mm	60 mm	3000 mm	4,00 mm	10,50 kg
KHU 60-30E	40 mm	60 mm	6000 mm	4,00 mm	19,93 kg

H : Height
B : Width
L : Length
t : Material thickness
G : Weight

DETAILS / APPLICATIONS

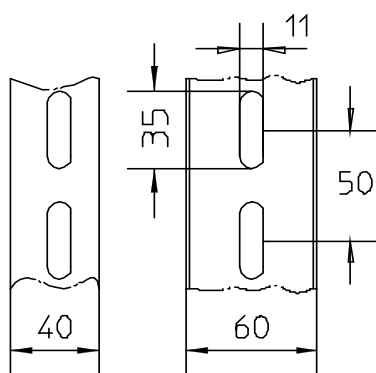

$$\begin{aligned}
 A_0 &= 3,75 \text{ cm}^2 \\
 W_y &= 7,03 \text{ cm}^3 \\
 W_z &= 2,47 \text{ cm}^3 \\
 I_y &= 21,10 \text{ cm}^4 \\
 I_z &= 6,73 \text{ cm}^4
 \end{aligned}$$

OPTIONAL ACCESSORIES

BGU 60, SU 60, KW, WPHS-K, KLS, BL 4



System E30 - E90. CNBOP-PIB nr CNBOP-PIB-KOT-2017/0013-3703

