

RGS 35

Cable tray, heavy, perforated, height=35 mm

Cable tray, heavy, perforated, head shape suitable for positive locking covers, with longitudinal and lateral reinforcing rims reducing bottom deflection, certified including electrical conductivity according to DIN EN 61537. Side and bottom connectors are provided for assembly.

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Product | H | B | L | A | Q_{sk} | t | G |
|------------|-------|--------|---------|--------------------|-----------|---------|----------|
| RGS 35-05S | 35 mm | 50 mm | 3000 mm | 17 cm ² | 0,03 kN/m | 1,50 mm | 4,60 kg |
| RGS 35-10S | 35 mm | 100 mm | 3000 mm | 31 cm ² | 0,05 kN/m | 1,50 mm | 6,20 kg |
| RGS 35-20S | 35 mm | 200 mm | 3000 mm | 63 cm ² | 0,10 kN/m | 1,50 mm | 9,60 kg |
| RGS 35-30S | 35 mm | 300 mm | 3000 mm | 96 cm ² | 0,15 kN/m | 1,50 mm | 12,60 kg |

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Product | H | B | L | A | Q_{sk} | t | G |
|------------|-------|--------|---------|--------------------|-----------|---------|----------|
| RGS 35-05F | 35 mm | 50 mm | 3000 mm | 17 cm ² | 0,03 kN/m | 1,50 mm | 5,10 kg |
| RGS 35-10F | 35 mm | 100 mm | 3000 mm | 31 cm ² | 0,05 kN/m | 1,50 mm | 7,00 kg |
| RGS 35-20F | 35 mm | 200 mm | 3000 mm | 63 cm ² | 0,10 kN/m | 1,50 mm | 10,70 kg |
| RGS 35-30F | 35 mm | 300 mm | 3000 mm | 96 cm ² | 0,15 kN/m | 1,50 mm | 14,40 kg |


Stainless steel, according to ASTM 304 / BS 304 S 3

| Product | H | B | L | A | Q_{sk} | t | G |
|------------|-------|--------|---------|--------------------|-----------|---------|----------|
| RGS 35-05E | 35 mm | 50 mm | 3000 mm | 17 cm ² | 0,03 kN/m | 1,50 mm | 4,60 kg |
| RGS 35-10E | 35 mm | 100 mm | 3000 mm | 31 cm ² | 0,05 kN/m | 1,50 mm | 6,20 kg |
| RGS 35-20E | 35 mm | 200 mm | 3000 mm | 63 cm ² | 0,10 kN/m | 1,50 mm | 9,60 kg |
| RGS 35-30E | 35 mm | 300 mm | 3000 mm | 96 cm ² | 0,15 kN/m | 1,50 mm | 12,90 kg |



- H** : Height
- B** : Width
- L** : Length
- t** : Material thickness
- A** : Cross section area
- Q_{sk}** : Distributed load control cable
- G** : Weight

DETAILS / APPLICATIONS

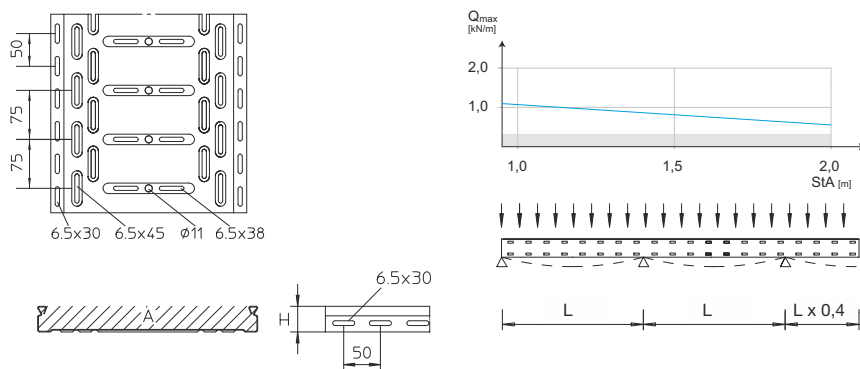

OPTIONAL ACCESSORIES

RB 35, RB45 35, RAE 35, RAA 35, RA 35, RK 35, RVB 35, RR 35, RAB 35, REB, RGV 35, RGVS, VB, RTR 35, KLR



Do not walk upon!

