


RB-BS 60

cable tray bend Maintenance of function, specified system

cable tray bend, 90°, for horizontal change of direction with integrated connectors

The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

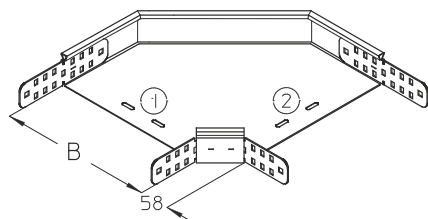

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Product | H | B | G |
|------------------|-------|------------|---------|
| RB-BS 60-10S | 60 mm | 100 mm | 0.77 kg |
| ----- | | | |
| incl.: 4x KLR | | fixing set | |
| RB-BS 60-20S | 60 mm | 200 mm | 1.18 kg |
| ----- | | | |
| incl.: 4x KLR | | fixing set | |
| RB-BS 60-30S | 60 mm | 300 mm | 1.70 kg |
| ----- | | | |
| incl.: 4x KLR | | fixing set | |
| RB-BS 60-40S | 60 mm | 400 mm | 2.35 kg |
| ----- | | | |
| incl.: 4x KLR | | fixing set | |

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Product | H | B | G |
|--------------------|-------|------------|---------|
| RB-BS 60-10F | 60 mm | 100 mm | 0.87 kg |
| ----- | | | |
| incl.: 4x KLR E | | fixing set | |
| RB-BS 60-20F | 60 mm | 200 mm | 1.33 kg |
| ----- | | | |
| incl.: 4x KLR E | | fixing set | |





| Product | H | B | G |
|-------------------|-------|------------|---------|
| RB-BS 60-30F | 60 mm | 300 mm | 1,91 kg |
| ----- | | | |
| incl: 4x KLR E | | fixing set | |
| RB-BS 60-40F | 60 mm | 400 mm | 2.64 kg |
| ----- | | | |
| incl: 4x KLR E | | fixing set | |

H : height
B : width
G : weight

OPTIONAL ACCESSORIES

VB-BS



System E 90. CNBOP-PIB nr CNBOP-PIB-KOT-2017/0013-3703 edition 3

