


AMA18

Nakrętka kotwowa, A 7 / A 8

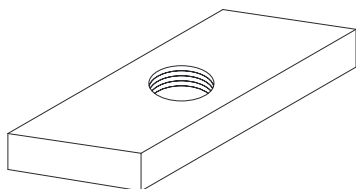

Ocynk zanurzeniowo-ogniowy, zgodnie z BS 729 (DIN EN ISO 1461)

Produkt	Ø	t	G
AMA18 M6F	6 mm	5,00 mm	2,70 kg/100
AMA18 M8F	8 mm	6,00 mm	3,00 kg/100
AMA18 M10F	10 mm	8,00 mm	3,80 kg/100

Stal nierdzewna, zgodnie z ASTM 304 / BS 304 S 3

Produkt	Ø	t	G
AMA18 M6E	6 mm	5,00 mm	2,70 kg/100
AMA18 M8E	8 mm	6,00 mm	3,00 kg/100
AMA18 M10E	10 mm	8,00 mm	3,80 kg/100

Ø : Średnica

t : Grubość materiału

G : Waga



DETALE / ZASTOSOWANIE

