


SD-BS

Straddling dowel

Permissible as single fastening. Permissible load in cracked and non-cracked normal concrete of strength $\geq C20/25$. Manufacturer's information has to be observed strictly.




Galvanized, according to ISO 4042

Product	L_{min}	D	\emptyset	t	P_{zul}	G
SD-BS 6/5	36 mm	6 mm	6 mm	0 - 5 mm	2,4 kN	0,01 kg

G : Weight

DETAILS / APPLICATIONS

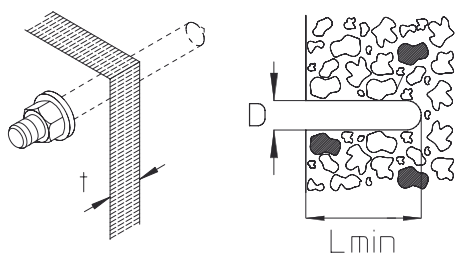

System E30 - E90. CNBOP-PIB nr CNBOP-PIB-KOT-2017/0013-3703

