


VAS-AS

Shear connector rod, stone



Manufacturer's information has to be observed strictly (Z-21.3-1824). load specifications are dependent on the ground. 30-40 dowels per cartridge.

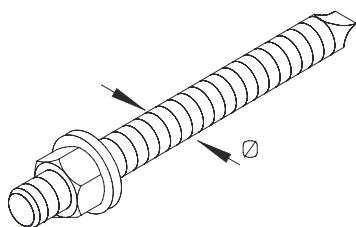

Galvanized, according to ISO 4042

Product	L_{min}	D	Ø	t	G
VAS-AS 8/15	80 mm	10 mm	8 mm	0 - 15 mm	4,2 kg/100
VAS-AS 10/25	80 mm	12 mm	10 mm	0 - 25 mm	7,0 kg/100
VAS-AS 12/40	80 mm	14 mm	12 mm	0 - 40 mm	11,8 kg/100

Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	L_{min}	D	Ø	t	G
VAS-AS 8/15E4	80 mm	10 mm	8 mm	0 - 15 mm	4,2 kg/100
VAS-AS 10/25E4	80 mm	12 mm	10 mm	0 - 25 mm	7,2 kg/100
VAS-AS 12/40E4	80 mm	14 mm	12 mm	0 - 40 mm	12,1 kg/100

L_{min} : Minimum drilling depth

D : Diameter


Ø : Diameter

t : Material thickness

G : Weight



DETAILS / APPLICATIONS

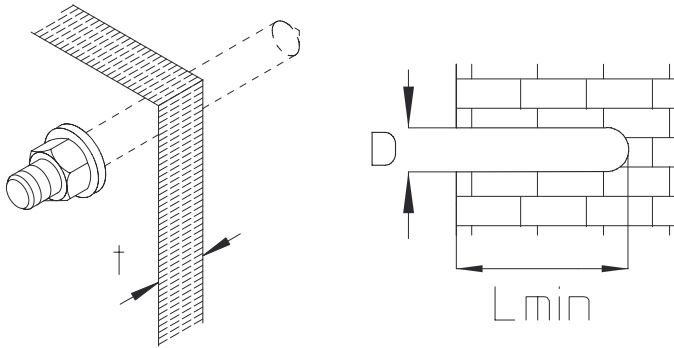

OPTIONAL ACCESSORIES

VAS-BS, VAS-M, VAS-SH



System E30 - E90. CNBOP-PIB nr CNBOP-PIB-KOT-2017/0013-3703

