


VAS-M

Shear connector mortar



Manufacturer's information has to be observed strictly. Dowels per cartridge in solid brick: VAS-AS 8/15 approx. 50x; VAS-AS 10/25 approx. 40x; VAS-AS 12/40 approx. 30x Dowels per cartridge in perforated brick: VAS-AS + VAS-SH approx. 14x.

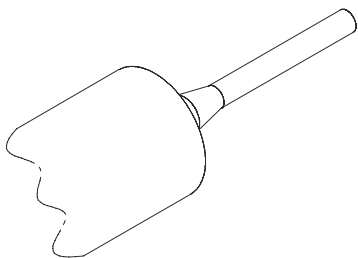

Product	G
VAS-M	67,2 kg/100

G : Weight

OPTIONAL ACCESSORIES

VA-AP



System E30 - E90. CNBOP-PIB nr CNBOP-PIB-KOT-2017/0013-3703

