


BP

Perforated grounding strip

Perforated grounding strip, length L=2000 mm.

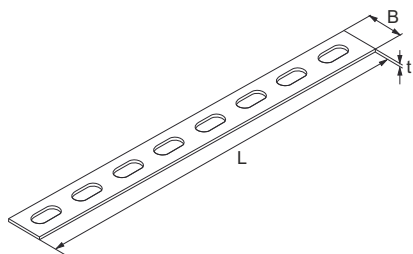

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	B	L	t	G
BP 1,5x16x2000F	16 mm	2000 mm	1,50 mm	0,27 kg
BP 2x16x2000F	16 mm	2000 mm	2,00 mm	0,34 kg
BP 2x25x2000F	25 mm	2000 mm	2,00 mm	0,65 kg
BP 3x25x2000F	25 mm	2000 mm	3,00 mm	0,96 kg
BP 3x30x2000F	30 mm	2000 mm	3,00 mm	1,23 kg

B : Width

L : Length

t : Material thickness

G : Weight

