


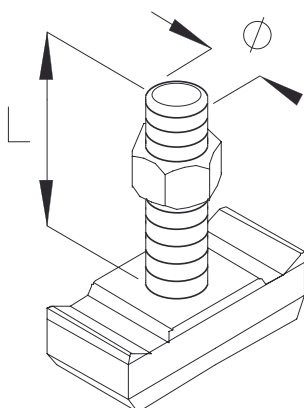

HS18

Śruba z łbem młoteczkowym, A 7/ A 8/ A 9

Ocynk galwaniczny, zgodnie z ISO 4042

Produkt	L	Ø	G
HS18 10X30	30 mm	10 mm	5,90 kg/100
HS18 10X40	40 mm	10 mm	6,30 kg/100
HS18 10X50	50 mm	10 mm	6,90 kg/100
HS18 10X60	60 mm	10 mm	7,40 kg/100
HS18 12X30	30 mm	12 mm	7,40 kg/100
HS18 12X40	40 mm	12 mm	7,90 kg/100
HS18 12X60	60 mm	12 mm	9,40 kg/100
HS18 16X40	40 mm	16 mm	13,40 kg/100
HS18 16X60	60 mm	16 mm	16,00 kg/100
HS18 16X80	80 mm	16 mm	18,80 kg/100

Ocynk zanurzeniowo-ogniowy, zgodnie z BS 729 (DIN EN ISO 1461)

Produkt	L	Ø	G
HS18 12X30F	30 mm	12 mm	7,60 kg/100

Stal kwasoodporna, zgodnie z ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11

Produkt	L	Ø	G
HS18 10X30E4	30 mm	10 mm	6,00 kg/100
HS18 10X40E4	40 mm	10 mm	6,50 kg/100
HS18 10X50E4	50 mm	10 mm	7,00 kg/100

Strona 1



L : Długość
Ø : Średnica
G : Waga

DETALE / ZASTOSOWANIE

