


WPLB 150

Wide-span bend, height=150 mm

Wide-span bend 90° for horizontal change of direction, with integrated connectors. Formed components must be supported at all sides.

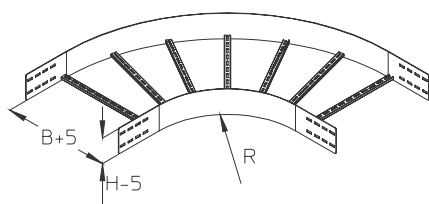

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	R	G
WPLB 150-20F	150 mm	200 mm	450 mm	10,97 kg

Incl.:				
8x KLS 10X20F			Fixing set	
WPLB 150-30F	150 mm	300 mm	450 mm	11,19 kg

Incl.:				
8x KLS 10X20F			Fixing set	
WPLB 150-40F	150 mm	400 mm	450 mm	13,14 kg

Incl.:				
8x KLS 10X20F			Fixing set	
WPLB 150-50F	150 mm	500 mm	450 mm	14,53 kg

Incl.:				
8x KLS 10X20F			Fixing set	
WPLB 150-60F	150 mm	600 mm	450 mm	15,62 kg

Incl.:				
8x KLS 10X20F			Fixing set	

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	R	G
WPLB 150-20E	150 mm	200 mm	450 mm	10,31 kg

Incl.:				
8x KLS 10X20E			Fixing set	





Product	H	B	R	G
WPLB 150-30E	150 mm	300 mm	450 mm	11,20 kg
Incl.: 8x KLS 10X20E			Fixing set	
WPLB 150-40E	150 mm	400 mm	450 mm	12,36 kg
Incl.: 8x KLS 10X20E			Fixing set	
WPLB 150-50E	150 mm	500 mm	450 mm	13,67 kg
Incl.: 8x KLS 10X20E			Fixing set	
WPLB 150-60E	150 mm	600 mm	450 mm	14,67 kg
Incl.: 8x KLS 10X20E			Fixing set	

OPTIONAL ACCESSORIES

- H** : Height
- B** : Width
- R** : Radius
- G** : Weight



UL classified

