


## WPLS 100

Wide-span inside riser, height=100 mm

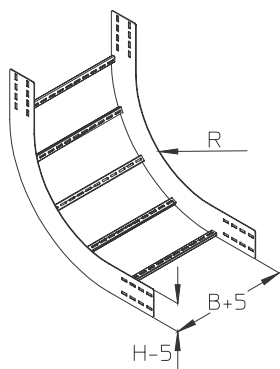

Wide-span inside riser 90° for vertical change of direction, with integrated connectors. Formed components must be supported at all sides.

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	R	G
WPLS 100-20F	100 mm	200 mm	450 mm	6,60 kg
-----				
Incl.:				
8x KLS 10X20F		Fixing set		
WPLS 120-30F	100 mm	300 mm	450 mm	6,89 kg
-----				
Incl.:				
8x KLS 10X20F		Fixing set		
WPLS 100-40F	100 mm	400 mm	450 mm	7,19 kg
-----				
Incl.:				
8x KLS 10X20F		Fixing set		
WPLS 100-50F	100 mm	500 mm	450 mm	7,48 kg
-----				
Incl.:				
8x KLS 10X20F		Fixing set		
WPLS 100-60F	100 mm	600 mm	450 mm	7,78 kg
-----				
Incl.:				
8x KLS 10X20F		Fixing set		





Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	R	G
WPLS 100-20E	100 mm	200 mm	450 mm	6,21 kg
-----				
Incl.:				
8x KLS 10X20E		Fixing set		
WPLS 100-30E	100 mm	300 mm	450 mm	6,48 kg
-----				
Incl.:				
8x KLS 10X20E		Fixing set		
WPLS 100-40E	100 mm	400 mm	450 mm	6,76 kg
-----				
Incl.:				
8x KLS 10X20E		Fixing set		
WPLS 100-50E	100 mm	500 mm	450 mm	7,04 kg
-----				
Incl.:				
8x KLS 10X20E		Fixing set		
WPLS 100-60E	100 mm	600 mm	450 mm	7,31 kg
-----				
Incl.:				
8x KLS 10X20E		Fixing set		

**H** : Height  
**B** : Width  
**R** : Radius  
**G** : Weight

## OPTIONAL ACCESSORIES

