

WPR 150

Wide-span cable tray, height=150 mm

Wide-span cable tray, additional transverse rigidity due to welded and ripped inlay sheet. Electrical conductivity tested according to DIN EN 61537.

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	t	A	Q _{SK}	G
WPR 150-20S	150 mm	200 mm	6000 mm	1,75 mm	256 cm ²	0,38 kN/m	45,13 kg
WPR 150-30S	150 mm	300 mm	6000 mm	1,75 mm	384 cm ²	0,58 kN/m	50,81 kg
WPR 150-40S	150 mm	400 mm	6000 mm	1,75 mm	512 cm ²	0,77 kN/m	56,68 kg
WPR 150-50S	150 mm	500 mm	6000 mm	1,75 mm	640 cm ²	0,96 kN/m	62,55 kg
WPR 150-60S	150 mm	600 mm	6000 mm	1,75 mm	768 cm ²	1,15 kN/m	68,41 kg

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	A	Q _{SK}	G
WPR 150-20F	150 mm	200 mm	6000 mm	1,75 mm	256 cm ²	0,38 kN/m	48,28 kg
WPR 150-30F	150 mm	300 mm	6000 mm	1,75 mm	384 cm ²	0,58 kN/m	54,36 kg
WPR 150-40F	150 mm	400 mm	6000 mm	1,75 mm	512 cm ²	0,77 kN/m	60,64 kg
WPR 150-50F	150 mm	500 mm	6000 mm	1,75 mm	640 cm ²	0,96 kN/m	66,92 kg
WPR 150-60F	150 mm	600 mm	6000 mm	1,75 mm	768 cm ²	1,15 kN/m	73,20 kg

Stainless steel, according to ASTM 304 / BS 304 S 3


Product	H	B	L	t	A	Q _{SK}	G
WPR 150-20E	150 mm	200 mm	6000 mm	1,75 mm	256 cm ²	0,38 kN/m	48,74 kg



Product	H	B	L	t	A	Q_{sk}	G
WPR 150-30E	150 mm	300 mm	6000 mm	1,75 mm	384 cm ²	0,58 kN/m	55,62 kg
WPR 150-40E	150 mm	400 mm	6000 mm	1,75 mm	512 cm ²	0,77 kN/m	62,70 kg
WPR 150-50E	150 mm	500 mm	6000 mm	1,75 mm	640 cm ²	0,96 kN/m	69,78 kg
WPR 150-60E	150 mm	600 mm	6000 mm	1,75 mm	768 cm ²	1,15 kN/m	76,88 kg

- H** : Height
- B** : Width
- L** : Length
- t** : Material thickness
- A** : Cross section area
- Q_{sk}** : Distributed load control cable
- G** : Weight

DETAILS / APPLICATIONS

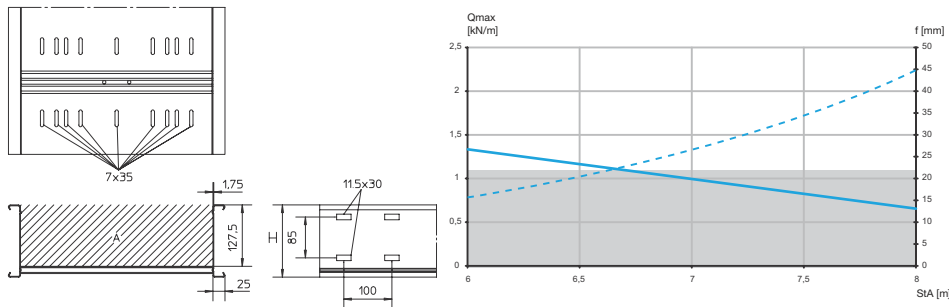

OPTIONAL ACCESSORIES

WPRK 150, WPV 150, WPVH 150, WPVV 150, WPTR 150, WPHS-A, WPHS-K, WPHS-P, WPHS-IS, WPREB, WPRB 150, WPRA 150, WPRAA 150, VB



Do not walk upon!



UL classified

