


WPV 150

Wide-span coupler, height=150 mm

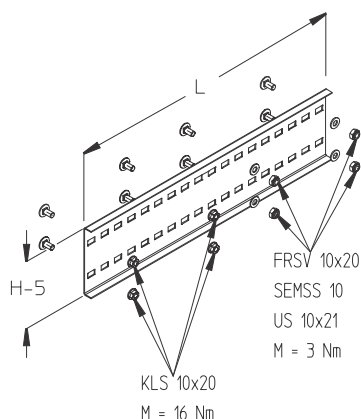

In order to compensate for the heat expansion one side of the connector is mounted as a loose bearing. The given torque must be observed. The other side of the connector is to be mounted as a fixed bearing. A minimum distance of 4 mm must be kept between the cable ladders.

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	L	G
WPV 150S	150 mm	600 mm	1,79 kg
Incl.:			
4x KLS 10X20 4x FRSV 10X20 4x US 10X21 4x SEMSS 10		Fixing set Round-head screw with short square Square washer, DIN 125 Hexagon-nut, self-locking, DIN 985	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	L	G
WPV 150F	150 mm	600 mm	1,92 kg
Incl.:			
4x KLS 10X20F 4x FRSV 10X20F 4x US 10X21F 4x SEMSS 10E		Fixing set Round-head screw with short square Square washer, DIN 125 Hexagon-nut, self-locking, DIN 985	

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	L	G
WPV 150E	150 mm	600 mm	1,79 kg
Incl.:			
4x KLS 10X20E 4x FRSV 10X20E 4x US 10X21E 4x SEMSS 10E		Fixing set Round-head screw with short square Square washer, DIN 125 Hexagon-nut, self-locking, DIN 985	

H : Height

L : Length

G : Weight

Page 1

