


## WLV 200

Wide-span connector, height = 200 mm

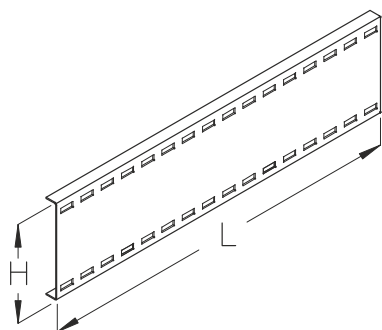

Suitable for wide-span cable tray WL(R) 200.

In order to compensate for the heat expansion one side of the connector is mounted as a loose bearing. The given torques must be observed. The other side of the connector is to be mounted as a fixed bearing. A minimum distance of 4mm must be kept between the cable trays.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	t	G
WLV 200S	203 mm	34 mm	799 mm	2,50 mm	4,05 kg
-----					
Incl.:					
8x KLS 10x20			Clamp fastening set		

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
WLV 200F	203 mm	34 mm	799 mm	2,50 mm	4,34 kg
-----					
Incl.:					
8x KLS 10x20F			Clamp fastening set		

**H** : Height  
**B** : Width  
**L** : Length  
**t** : Material thickness  
**G** : Weight

## DETALE / ZASTOSOWANIE

