


WLVH 200

Wide-span connector, horizontal, height = 200 mm

Suitable for wide-span cable tray WL(R) 200.

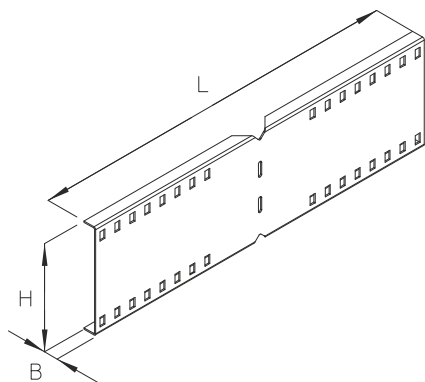

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	t	G
WLVV 200S	203 mm	26 mm	730 mm	2,50 mm	3,45 kg
W kompletcie:					
8x FRSV 10x20		Round-head screw with short square, DIN 603			
8x SEMS 10		Hexagon-nut with flange, DIN EN 1661			

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
WLVV 200F	203 mm	26 mm	730 mm	2,50 mm	3,69 kg
W kompletcie:					
8x FRSV 10x20F		Round-head screw with short square, DIN 603			
8x SEM 10F		Hexagon-nut, DIN 934			
8x US 10x21F		Washer, DIN 125			

H : Height
B : Width
L : Length
t : Material thickness
G : Weight



DETAILS / APPLICATIONS

