

RIS 60

Cable installation tray, heavy, height=60 mm

Cable installation tray, heavy with big side and bottom perforation for leading cables out, head shape suitable for positive locking covers, certified including electrical conductivity according to DIN EN 61537. Side and bottom connectors are provided for assembly.



• BMA
• GEPRU
• TYPE
• APPRO



Ocynk metodą Sendzimira, zgodnie z DIN EN 10346

Product	H	B	L	t	A	Q _{SK}	G
RIS 60-05S	60 mm	50 mm	3000 mm	1,50 mm	26 cm ²	0,04 kN/m	6,80 kg
RIS 60-10S	60 mm	100 mm	3000 mm	1,50 mm	56 cm ²	0,09 kN/m	8,60 kg
RIS 60-15S	60 mm	150 mm	3000 mm	1,50 mm	84 cm ²	0,13 kN/m	10,40 kg
RIS 60-20S	60 mm	200 mm	3000 mm	1,50 mm	113 cm ²	0,17 kN/m	12,20 kg
RIS 60-30S	60 mm	300 mm	3000 mm	1,50 mm	171 cm ²	0,26 kN/m	15,80 kg





Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	A	Q _{SK}	G
RIS 60-05F	60 mm	50 mm	3000 mm	1,50 mm	26 cm ²	0,04 kN/m	7,60 kg
RIS 60-10F	60 mm	100 mm	3000 mm	1,50 mm	56 cm ²	0,09 kN/m	9,60 kg
RIS 60-15F	60 mm	150 mm	3000 mm	1,50 mm	84 cm ²	0,13 kN/m	11,60 kg
RIS 60-20F	60 mm	200 mm	3000 mm	1,50 mm	113 cm ²	0,17 kN/m	13,60 kg
RIS 60-30F	60 mm	300 mm	3000 mm	1,50 mm	171 cm ²	0,26 kN/m	17,70 kg

- H** : Height
- B** : Width
- L** : Length
- t** : Material thickness
- A** : Cross section area
- Q_{SK}** : Distributed load control cable
- G** : Weight



DETAILS / APPLICATIONS

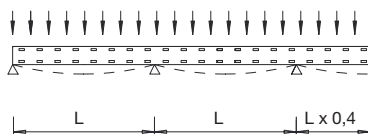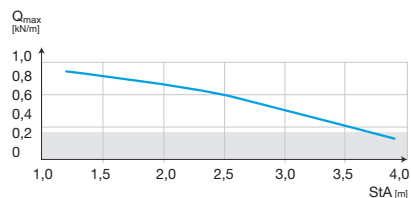

OPTIONAL ACCESSORIES

RIV 60, VB, REB, KSR, AHB, KLR, RID, RIDR



Do not walk upon!

